


Agilent N9310A RF Signal Generator

Technical Overview



All the capability
and reliability of an
Agilent instrument
you need — at a price
you've always wanted

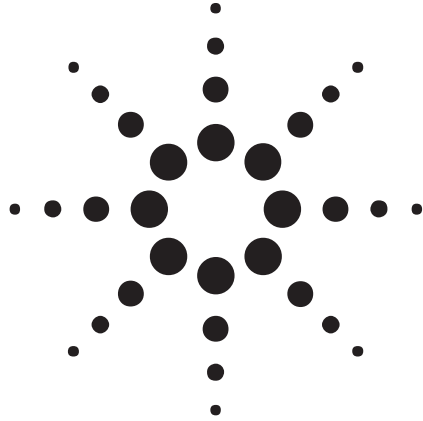

N9310A RF Signal Generator



Agilent Technologies

Low-cost manufacturing



This implies performing just sufficient performance checks to get the product finished and launched into the production as quickly as possible.

If you're wondering how to reduce manufacturing test overheads without compromising quality, your answer is here.

You'll even find an N9310A RF signal generator fits your budget for those mini R&D projects or when your need initiate a low-cost project for product enhancements and extensions.

Needing to build today's consumer electronics devices better, faster?

An increasing number of today's consumer electronics devices incorporate sophisticated RF technologies. You'll be trying hard to ensure the quality of their product design and production while simultaneously reducing costs and time to market.

Dual language options enhance usability anywhere

As manufacturing moves around the world, so will your engineers and technicians. Therefore, meeting the challenge of operating in a multi-lingual environment is essential.

Now, that's easy with the N9310A RF signal generator.

It already provides built-in dual-language (English and Chinese) on-screen instructions, parameters and softkeys shortly, other languages will follow.

So, regardless of where you deploy your engineering and hardware resources, everyone will find operating an N9310A signal generator straightforward.

Agilent's new low-cost, compact signal generator, the N9310A, finds application in low-cost R&D projects as well as high-volume electronics manufacturing.



When you want to make effortless automated tests, or use the generator remotely, simply use the built-in USB interfaces. Just connect your PC to the signal generator, run the virtual panel software and you have all the controls replicated on your PC.



Low-cost ATE – for true, low-cost volume manufacturing

There's often a need to integrate a number of signal generators into automated test systems. You'll find this surprisingly affordable with N9310A RF signal generators. It is easy and inexpensive to add a number of these signal generators to your existing ATE systems.

Alternatively, you may simply want to operate your signal generator remotely. Your generator comes with PC-based virtual panel software utilities and drivers. USB ports on back panels make interconnection easy.

PC control is then through the virtual panel display. This replicates all controls and setup parameters on the large, full-color display on the generator's front panel. Furthermore, this also provides useful productivity tools for you such as data logging and graphics.

Optional rack mount kit enables simple stacking with other test equipment in standard test racks. The rackmounted signal generator is full width and a compact, standard 3U height.



Multi-language display and instruction help ensure easy operation of your signal generator, no matter who's using it.



Agilent's new low-cost, compact signal generator provides a money-saving solution in high-volume manufacturing applications.

Now you know the signal generator to choose when you are ramping up your volume manufacturing. Moreover, you can be confident that the price and performance will please your management team, too.

Installation & maintenance

Make the N9310A signal generator – one of Agilent's new ValuePlus range of testers – part of your solution to simple, economic professional test.

When you are out on the road or testing in the field, you will find the optional carrying case provides appropriate protection for your N9310A signal generator.

Signal generators are one of the essential basic test tools used during general purpose RF product development test.

Large, color display helps easy, remote set up and operation

To help check set up of output values and parameters when operating at a distance from the generator, users will welcome the large, color screen.

A clear, bright color screen with associated, easy-to-read soft keys helps users quickly set up signal output parameters.

When you are competing for the world market, you'll want to win by supplying the best products, and at prices lower than those of your competitors.

You will want the world know you have the best. And part of that 'best' is using the best test equipment – equipment that the rest of the world has come to rely upon.

For years, Agilent test equipment has helped many top companies achieve these goals. Now, with the exceptionally low price of the N9310A signal generator, you can afford to own the test equipment you always wanted.

An effective, professional field installation and maintenance tool

It's not just in consumer electronics that demand is shifting toward lower-cost and just-enough performance of the test instruments. Many installation and maintenance tasks have the same demand.

Being small and lightweight, an N9310A signal generator is as convenient for field troubleshooting use as it is for bench-top use, where space is often at a premium.

Built to perform—priced for you to compete



Handy, practical and easy to use in the field



Performing general purpose installation and maintenance, or service and repair, but don't want more test functionality than necessary – Agilent's N9310A RF signal generator is your answer.

R&D

Performing essential R&D — yet to an ever tighter budget?

Just because your customers are forcing you to work to tighter margins, doesn't mean they want you to compromise on quality.


Even the simplest or most basic of today's electronics products with RF content demand adequate and proper design verification.

Nevertheless, you know that it's not every day that each of your development engineers needs the full functionality of a high-performance signal generator.

That's the time to give them an Agilent N9310A RF signal generator.

They'll be properly equipped to make all those essential tests and you can rely on Agilent's experience, expertise, customer support and service, while continuing to grow your business.

If you've been wondering how to get the best out of your limited R&D budget, then it's time to experience the new generation of Agilent's test equipment.

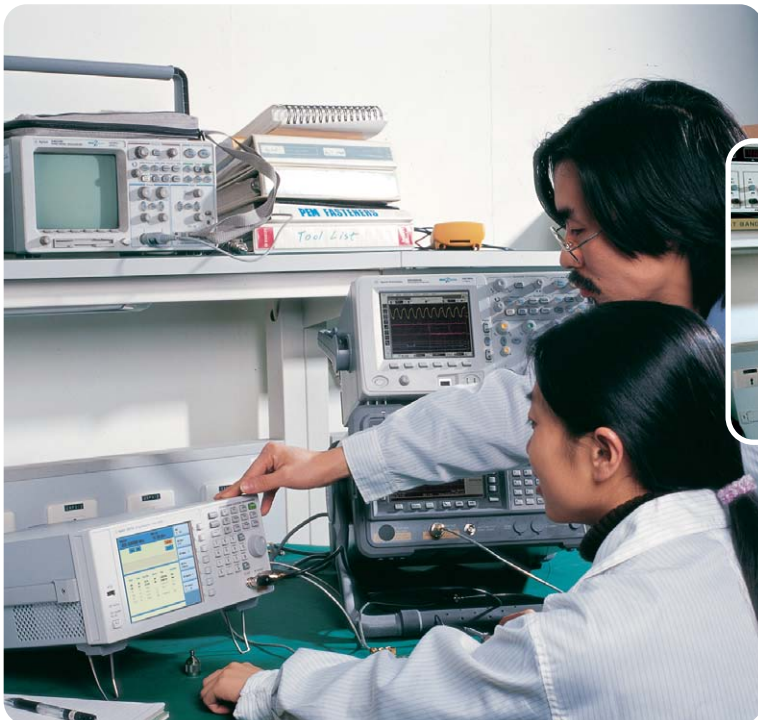

**Helps you move ahead
of your competition**

Education

Educating tomorrow's technicians and engineers — but restricted on your capital spend?

Help your students and trainees gain the edge. Now you don't need to compromise on the quality of their test equipment. Nor do you need to limit them to one piece of equipment to a class.

This signal generator, part of the low-cost series from Agilent Technologies allows you to put Agilent's renowned quality and precision into every student's hands.

Educators hold Agilent testers in the highest esteem. Therefore, you can be confident and proud of your standards in the classroom, and your students will have confidence in their experimental results.

Your students will be able to focus on RF circuit experimentation and exercises, because signal generator operation is straightforward. Yet you'll find it has sufficient performance for many basic research projects, too, where you need a good, general-purpose local oscillator/signal source.

Affordable test instrumentation for every student

No compromise on Agilent support



Using Agilent test equipment in your educational establishment guarantees you are upholding the highest standards for the future, for tomorrow's engineers.

Affordable, fast support

When you are relying on Agilent test equipment for your manufacturing process, installation procedures, or maintenance programs, you need to know that you can rely on superior customer support in case of problems.

Buying test equipment from Agilent's new low-cost series still puts you in touch with top-line service and support when you need it. So, you can be confident that you are making the right choice for the right price.

Take a closer look — see what value with usability really means



Now that we've convinced you an Agilent N9310A RF signal generator has everything you need - check out availability- and buy with confidence.

You'll find its performance and our delivery is as sharp as our price.

One of Agilent Technologies new test instruments in the compact, low-cost series

Specifications

Supplemental Information

Frequency

Range:	9 kHz to 3.0 GHz	
Resolution:	0.1 Hz	
Switching speed:	< 10 ms	within 0.1 ppm of final frequency

Internal Reference Oscillator

Stability:	< ±1ppm/year < ±1ppm	Aging Temperature over 0 to 45 °C
-------------------	-------------------------	--------------------------------------

Timebase Reference Output

Frequency:	10 MHz
Amplitude:	> 0.35 Vrms level into 50 Ω
Connector:	BNC female

External Reference Input

Range:	2 MHz, 5 MHz, 10 MHz
Amplitude:	0.5 ~ 2 Vrms
Connector and impedance:	50 Ω; BNC female

Output

Power:	-127 to +13 dBm	+20 dBm settable
Resolution:	0.1 dB	
Accuracy:	< ±1dB	$F_c \geq 100 \text{ kHz}$, $-120 \leq \text{Level} \leq +13\text{dBm}$, 20 to 30 °C
Switching speed:	< 10 ms	< 0.3 dB deviation
VSWR (typical) :	< 1.6 < 1.8	1.5 MHz ≤ F_c < 2.5 GHz 2.5 GHz ≤ F_c ≤ 3 GHz
Output connector and impedance:	N-type; 50 Ω nominal	

Reversal Power Protection

DC voltage:	30 V	
RF power:	+36 dBm	1 minute; the warning for reversed power protection is nominally at +25 dBm

Spectral Purity

SSB Phase Noise:	< -95 dBc/Hz	Typical, Fc = 1 GHz; at 20 kHz offset
Residual FM:	< 30 Hz rms; < 90 Hz peak < 20 Hz rms	CW mode, Fc = 1 GHz; BW = 0.3 to 3 KHz ResFM optimized mode
Harmonics:	< -30 dBc	Level ≤ 0 dBm, Fc ≥ 1 MHz
Non-harmonics:	< -50 dBc	Level ≤ 0 dBm, >10 kHz from carrier

Sweep Modes

RF and LF:	
LF Sweep range:	20 Hz to 80 kHz
RF Sweep range:	9 kHz to 3 GHz
Sweep points:	2 to 1001
Dwell time:	10 ms to 1s
Amplitude:	
Sweep range:	-127 to +13 dBm
Sweep points:	2 to 1001
Dwell time:	10 ms to 1s

Simultaneous Modulation

		AM		I/Q	FM		ΦM	Pulse	
		Internal	External		Internal	External		Internal	External
AM	Internal	-	•	-	•	•	•	-	-
	External	•	-	-	•	•	•	-	-
I/Q		-	-	-	•	•	•	•	•
FM	Internal	•	•	•	-	•	-	•	•
	External	•	•	•	-	-	-	•	•
ΦM		•	•	•	-	-	-	•	•
Pulse	Internal	-	-	•	•	•	•	-	-
	External	-	-	•	•	•	•	-	-

Amplitude

Modulation (Fc > 100 kHz)

Operating modes:	Internal, external AC/DC	Envelope peak < maximum specified power
Range:	0 to 100%	
Resolution:	0.1%	1 kHz, 0 dBm and 80% modulation 1 kHz, 0 dBm and 80% modulation, THD
Rates:	DC/20 Hz to 20 kHz	
Accuracy:	< ± (5 % of setting +0.2%)	
Distortion:	< 2%	
External input:	MOD IN connector	Input voltage for 100% modulation depth Nominal
Sensitivity:	1 Vpeak	
Input impedance:	BNC; > 100 kΩ	

Frequency Modulation

Operating modes:	Internal, external AC/DC	
Frequency deviation:	20 Hz to 100 kHz	
Resolution:	< 1%	Minimum 1Hz
Rates:	AC/20 Hz to 80 kHz	
Distortion:	< 1%	1 kHz rate, THD, Deviation = 50 kHz
Deviation accuracy:	< \pm (5 % of FM deviation +300 Hz)	1 kHz, 0 dBm and 50 kHz deviation
Carrier frequency		
Deviation:	< 200 Hz	Relative to carrier; external mode
External input:	MOD IN connector	
Sensitivity:	1 V _{peak}	Input voltage for 100 kHz modulation deviation
Input impedance:	BNC; > 100 k Ω	Nominal

Phase Modulation

Operating modes:	Internal	
Phase deviation:	0 to 10 rad 0 to 5 rad	Rate \leq 10 kHz 10 kHz < Rate \leq 20 kHz
Resolution:	< 1%	
Rates:	300 Hz to 20 kHz	
Deviation accuracy:	< \pm (5% of FM deviation +0.2 rad)	1 kHz rate
Distortion:	< 1.5%	1 kHz rate, THD, Deviation = 5 rad
External input:	MOD IN connector	
Sensitivity:	1 V _{peak}	Input voltage for 10 rad modulation deviation
Input impedance:	BNC; > 100 k Ω	Nominal

Pulse Modulation

Operating modes:	Internal, external, AC/DC	
On/Off ratio:	\geq 40 dB	
Rise/fall time:	< 3 μ s	
Pulse width:	100 μ s to 1s	Internal, external
Pulse period:	200 μ s to 2s	Internal
Time resolution:	1 μ s	
Input connector and voltage level:	BNC female; TTL	

Internal Modulation Source

Waveform:	Sine	
Frequency range:	20 Hz to 80 kHz	
Resolution:	0.1 Hz	
Accuracy:	0.005%	Typical

LF Out
(Internal
Modulation Source)

Amplitude:	0 to 3 V _{peak}	Level Into 50 Ω
Output voltage		
Resolution:	< 1%	1 mV minimum resolution
Frequency response:	< ± 0.2 dB	20 Hz to 20 kHz
Total Harmonic		
Distortion:	< 0.1%	20 Hz to 20 kHz
Connector		
and impedance:	BNC female; < 1 Ω	Front panel

I/Q Modulation
(Option 001 only)

Operating mode:	External I/Q inputs	
VSWR:	< 1.5	
Full scale input:	$\sqrt{I^2 + Q^2} = 0.5V_{rms}$	
Modulation frequency		
range:	DC to 40 MHz	At 3 dB points
Carrier suppression:	40 dBc	Typical; Modulation frequency = 10 kHz
QPSK EVM:	3%	Typical; 1Msps. 0.22 RRC Filter
GMSK Phase error:	1.2° rms	Typical; 1Msps. BT= 0.5
Connector		
and impedance:	BNC female; 50 Ω	Rear panel

USB Connector

USB Host interface:	3 x A Plug	V 1.1 protocol
USB Device interface:	1 x B Plug	V 1.1 protocol

General

Power requirement:	100~240 Vac; 50~60 Hz	Auto-ranging
Power consumption:	65 W	
Temperature range:	5 ~ 45 °C	Operating
	-20 to 70 °C	Storage
Weight:	9.2 kg	Approximately
Dimensions:	132.5x320x400 mm	H x W x D

Ordering information

Model Number	Description	Note
N9310A	RF Signal Generator	Range: 9 kHz to 3 GHz
Option 001	Analog I/Q input capability	Requires external stimulus
Option 1CM	Rackmount flange kit	
Option 1TC	Hard transit case	

Manuals

N9310-90000	User's Guide-Chinese
N9310-90002	Quick Start Guide-Chinese
N9310-90000	User's Guide-English
N9310-90002	Quick Start Guide-English

CD

N9310-84500	Manual software CD.
-------------	---------------------

Warranty and service

Standard warranty is one year

R-51B-001-3C	1-year return to Agilent warranty extended to 3 years
--------------	---

Calibration¹

R-50C-011-3	Agilent calibration upfront support plan 3-year coverage
N9310A-0BW	Service manual, assembly level

¹ Option not available in all countries

Agilent Technologies' Test and Measurement Support, Services, and Assistance

Agilent Technologies aims to maximize the value you receive, while minimizing your risk and problems. We strive to ensure that you get the test and measurement capabilities you paid for and obtain the support you need. Our extensive support resources and services can help you choose the right Agilent products for your applications and apply them successfully. Every instrument and system we sell has a global warranty. Support is available for at least five years beyond the production life of the product. Two concepts underlie Agilent's overall support policy: Our Promise and Your Advantage.

Our Promise

Our Promise means your Agilent test and measurement equipment will meet its advertised performance and functionality. When you are choosing new equipment, we will help you with product information, including realistic performance specifications and practical recommendations from experienced test engineers. When you receive your new Agilent equipment, we can help verify that it works properly and help with initial product operation.

Your Advantage

Your Advantage means that Agilent offers a wide range of additional expert test and measurement services, which you can purchase according to your unique technical and business needs. Solve problems efficiently and gain a competitive edge by contracting with us for calibration, extra-cost upgrades, out-of-warranty repairs, and on-site education and training, as well as design, system integration, project management, and other professional engineering services. Experienced Agilent engineers and technicians worldwide can help you maximize your productivity, optimize the return on investment of your Agilent instruments and systems, and obtain dependable measurement accuracy for the life of those products.

www.agilent.com

For more information on Agilent Technologies' products, applications or services, please contact your local Agilent office.

Online assistance:

www.agilent.com/find/assist

Phone or fax

United States:

(tel) 800 829 4444

(fax) 800 829 4433

Canada:

(tel) 877 894 4414

(fax) 800 748 4866

China:

(tel) 877 810 0189

(fax) 800 820 2816

Europe:

(tel) 31 20 547 2111

Japan:

(tel) (81) 426 56 7832

(fax) (81) 426 56 7840

Korea:

(tel) 080 769 0800

(fax) 080 769 0900

Latin America:

(tel) (305) 269 7500

Taiwan:

(tel) 0800 047 866

(fax) 0800 286 331

Other Asia Pacific Countries:

(tel) (65) 6375 8100

(fax) (65) 6755 0042

Email: tm_ap@agilent.com

Microsoft and windows are U.S. registered trademarks of Microsoft Corporation.

Product specifications and descriptions in this document subject to change without notice.

Copyright ©Agilent Technologies

Printed in China, 1 October 2006

PN 5989-4466EN



Agilent Technologies