



N9010A EXA
X-Series Signal Analyzer
10 Hz to 3.6, 7.0, 13.6, 26.5, 32, or 44 GHz

Data Sheet



Definitions and Conditions

Specifications describe the performance of parameters covered by the product warranty and apply to the full temperature of 0 to 55 °C¹, unless otherwise noted.

95th percentile values indicate the breadth of the population (approx. 2 σ) of performance tolerances expected to be met in 95 percent of the cases with a 95 percent confidence, for any ambient temperature in the range of 20 to 30 °C. In addition to the statistical observations of a sample of instruments, these values include the effects of the uncertainties of external calibration references. These values are not warranted. These values are updated occasionally if a significant change in the statistically observed behavior of production instruments is observed.

Typical describes additional product performance information that is not covered by the product warranty. It is performance beyond specifications that 80 percent of the units exhibit with a 95 percent confidence level over the temperature range 20 to 30 °C. Typical performance does not include measurement uncertainty.

Nominal values indicate expected performance, or describe product performance that is useful in the application of the product, but are not covered by the product warranty.

The analyzer will meet its specifications when:

- It is within its calibration cycle
- Under auto couple control, except when Auto Sweep Time Rules = Accy
- Signal frequencies < 10 MHz, with DC coupling applied
- The analyzer has been stored at an ambient temperature within the allowed operating range for at least two hours before being turned on, if it had previously been stored at a temperature range inside the allowed storage range, but outside the allowed operating range
- The analyzer has been turned on at least 30 minutes with Auto Align set to normal, or, if Auto Align is set to off or partial, alignments must have been run recently enough to prevent an Alert message; if the Alert condition is changed from Time and Temperature to one of the disabled duration choices, the analyzer may fail to meet specifications without informing the user

1. For earlier instruments (Serial number prefix < MY/SG/US5052), the full temperature ranges from 5 to 50 °C.

This EXA signal analyzer data sheet is a summary of the complete specifications and conditions for N9010A EXA signal analyzers (including N9010AEP Express EXA signal analyzers), which are available in the EXA Signal Analyzer Specification Guide. The EXA Signal Analyzer Specification Guide can be obtained on the web at:

www.agilent.com/find/exa_manuals

For ordering information, refer to the EXA Signal Analyzer Configuration Guide (5989-6531EN).

Balance the challenges

Whether you're focused on time-to-market, time-to-volume, or cost of test, your choice of economy-class signal analyzer should help you save both time and money. That's the idea that drives the Agilent EXA signal analyzer—and it's the fastest way to maximize throughput on the production line. From measurement speed to code compatibility, it makes every millisecond count and helps reduce your overall cost of test.

Frequency and Time Specifications

Frequency range	DC coupled	AC coupled
Option 503	10 Hz to 3.6 GHz	10 MHz to 3.6 GHz
Option 507	10 Hz to 7 GHz	10 MHz to 7 GHz
Option 513	10 Hz to 13.6 GHz	10 MHz to 13.6 GHz
Option 526	10 Hz to 26.5 GHz	10 MHz to 26.5 GHz
Option 532	10 Hz to 32 GHz	NA
Option 544	10 Hz to 44 GHz	NA
Band	LO multiple (N)	
0	1	10 Hz to 3.6 GHz
1	1	3.5 to 7.0 GHz
1	1	3.5 to 8.4 GHz
2	2	8.4 to 13.6 GHz
3	2	13.5 to 17.1 GHz
4	4	17 to 26.5 GHz
5	4	26.4 to 34.5 GHz
6	8	34.4 to 44 GHz
Frequency reference		
Accuracy	\pm [(time since last adjustment x aging rate) + temperature stability + calibration accuracy]	
Aging rate	Option PFR $\pm 1 \times 10^{-7}$ / year $\pm 1.5 \times 10^{-7}$ / 2 years	Standard $\pm 1 \times 10^{-6}$ / year
Temperature stability 20 to 30 °C Full temperature range	Option PFR $\pm 1.5 \times 10^{-8}$ $\pm 5 \times 10^{-8}$	Standard $\pm 2 \times 10^{-6}$ $\pm 2 \times 10^{-6}$
Achievable initial calibration accuracy	Option PFR $\pm 4 \times 10^{-8}$	Standard $\pm 1.4 \times 10^{-6}$
Example frequency reference accuracy (with Option PFR) 1 year after last adjustment	$= \pm (1 \times 1 \times 10^{-7} + 5 \times 10^{-8} + 4 \times 10^{-8})$ $= \pm 1.9 \times 10^{-7}$	
Residual FM Option PFR Standard	$\leq (0.25 \text{ Hz} \times N)$ p-p in 20 ms nominal $\leq (10 \text{ Hz} \times N)$ p-p in 20 ms nominal See band table above for N (LO Multiple)	
Frequency readout accuracy (start, stop, center, marker)		
	\pm (marker frequency x frequency reference accuracy + 0.25 % x span + 5 % x RBW + 2 Hz + 0.5 x horizontal resolution ¹)	
Marker frequency counter		
Accuracy	\pm (marker frequency x frequency reference accuracy + 0.100 Hz)	
Delta counter accuracy	\pm (delta frequency x frequency reference accuracy + 0.141 Hz)	
Counter resolution	0.001 Hz	
Frequency span (FFT and swept mode)		
Range	0 Hz (zero span), 10 Hz to maximum frequency of instrument	
Resolution	2 Hz	
Accuracy Swept FFT	$\pm (0.25 \% \times \text{span} + \text{horizontal resolution})$ $\pm (0.10 \% \times \text{span} + \text{horizontal resolution})$	

1. Horizontal resolution is span/(sweep points – 1).

Sweep time and triggering		
Range	Span = 0 Hz Span ≥ 10 Hz	1 μs to 6000 s 1 ms to 4000 s
Accuracy	Span ≥ 10 Hz, swept Span ≥ 10 Hz, FFT Span = 0 Hz	± 0.01% nominal ± 40% nominal ± 0.01% nominal
Trigger	Free run, line, video, external 1, external 2, RF burst, periodic timer	
Trigger Delay	Span = 0 Hz or FFT Span ≥ 10 Hz, swept Resolution	–150 to +500 ms 0 to 500 ms 0.1 μs
Time gating		
Gate methods	Gated LO; gated video; gated FFT	
Gate length range (except method = FFT)	100.0 ns to 5.0 s	
Gate delay range	0 to 100.0 s	
Gate delay jitter	33.3 ns p-p nominal	
Sweep (trace) point range		
All spans	1 to 40001	
Resolution bandwidth (RBW)		
Range (–3.01 dB bandwidth)	1 Hz to 3 MHz (10 % steps), 4, 5, 6, 8 MHz	
Bandwidth accuracy (power)	1 Hz to 750 kHz 820 kHz to 1.2 MHz (< 3.6 GHz CF) 1.3 to 2 MHz (< 3.6 GHz CF) 2.2 to 3 MHz (< 3.6 GHz CF) 4 to 8 MHz (< 3.6 GHz CF)	± 1.0 % (± 0.044 dB) ± 2.0 % (± 0.088 dB) ± 0.07 dB nominal ± 0.15 dB nominal ± 0.25 dB nominal
Bandwidth accuracy (–3.01 dB) RBW range	1 Hz to 1.3 MHz	± 2 % nominal
Selectivity (–60 dB/–3 dB)	4.1:1 nominal	
EMI bandwidth (CISPR compliant)	200 Hz, 9 kHz, 120 kHz, 1 MHz	(Option EMC or N6141A ¹ required)
EMI bandwidth (MIL STD 461E compliant)	10 Hz, 100 Hz, 1 kHz, 10 kHz, 100 kHz, 1 MHz	(Option EMC or N6141A ¹ required)
Analysis bandwidth ²		
Maximum bandwidth	Option B40 ¹ Option B25 (standard) Standard	40 MHz 25 MHz 10 MHz
Video bandwidth (VBW)		
Range	1 Hz to 3 MHz (10 % steps), 4, 5, 6, 8 MHz, and wide open (labeled 50 MHz)	
Accuracy	± 6 % nominal	
Measurement speed ³		
	Standard nominal	Option PC4 nominal
Local measurement and display update rate	11 ms (90/s)	4 ms (250/s)
Remote measurement and LAN transfer rate	6 ms (167/s)	5 ms (200/s)
Marker peak search	5 ms	1.5 ms
Center frequency tune and transfer (RF)	22 ms	20 ms
Center frequency tune and transfer (μW)	49 ms	47 ms
Measurement/mode switching	75 ms	39 ms

1. Not available on millimeter-wave EXA (Option 532 or 544)

2. Analysis bandwidth is the instantaneous bandwidth available around a center frequency over which the input signal can be digitized for further analysis or processing in the time, frequency, or modulation domain.

3. Sweep points = 101.

Amplitude Accuracy and Range Specifications

Amplitude range	
Measurement range	Displayed average noise level (DANL) to +23 dBm
Input attenuator range (10 Hz to 26.5 GHz)	
Standard	0 to 60 dB in 10 dB steps
Option FSA	0 to 60 dB in 2 dB steps
Electronic attenuator (Option EA3)	
Frequency range	10 Hz to 3.6 GHz
Attenuation range	
Electronic attenuator range	0 to 24 dB, 1 dB steps
Full attenuation range (mechanical + electronic)	0 to 84 dB, 1 dB steps
Maximum safe input level	
Average total power (with and without preamp)	+30 dBm (1 W)
Peak pulse power	< 10 μ s pulse width, < 1 % duty cycle +50 dBm (100 W) and input attenuation \geq 30 dB
DC volts	
DC coupled	\pm 0.2 Vdc
AC coupled	\pm 100 Vdc
Display range	
Log scale	0.1 to 1 dB/division in 0.1 dB steps 1 to 20 dB/division in 1 dB steps (10 display divisions)
Linear scale	10 divisions
Scale units	dBm, dBmV, dB μ V, dBmA, dB μ A, V, W, A

Frequency response		Specification	95th percentile ($\approx 2\sigma$)
(10 dB input attenuation, 20 to 30 °C, preselector centering applied, σ = nominal standard deviation)			
RF/MW (Option 503, 507, 513, 526)	9 kHz to 10 MHz	± 0.8 dB	± 0.4 dB
	10 MHz ¹ to 3.6 GHz	± 0.6 dB	± 0.21 dB
	3.5 to 7.0 GHz	± 2.0 dB	± 0.69 dB
	6.9 to 13.6 GHz	± 2.5 dB	
	13.5 to 22.0 GHz	± 3.0 dB	
	22.0 to 26.5 GHz	± 3.2 dB	
Millimeter-wave (Option 532, 544)	9 kHz to 10 MHz	± 0.6 dB	± 0.28 dB
	10 to 50 MHz	± 0.45 dB	± 0.21 dB
	50 MHz to 3.6 GHz	± 0.45 dB	± 0.20 dB
	3.5 to 5.2 GHz	± 1.7 dB	± 0.91 dB
	5.2 to 8.4 GHz	± 1.5 dB	± 0.61 dB
	8.3 to 13.6 GHz	± 2.0 dB	± 0.61 dB
	13.5 to 17.1 GHz	± 2.0 dB	± 0.67 dB
	17.0 to 22.0 GHz	± 2.0 dB	± 0.78 dB
	22.0 to 26.5 GHz	± 2.5 dB	± 0.72 dB
	26.4 to 34.5 GHz	± 2.5 dB	± 1.11 dB
34.4 to 44 GHz	± 3.2 dB	± 1.42 dB	
Preamp on (P03, P07)			
RF/MW (Option 503, 507, 513, 526)	100 kHz to 3.6 GHz		± 0.28 dB nominal
	3.6 to 7.0 GHz		± 0.67 dB nominal
Preamp on (P03, P07, P32, P44)			
Millimeter-wave (Option 532, 544)	100 kHz to 3.6 GHz		± 0.28 dB nominal
	3.5 to 8.4 GHz		± 0.67 dB nominal
	8.4 to 26.5 GHz		± 0.50 dB nominal
	26.4 to 44 GHz		± 0.80 dB nominal

1. DC coupling required to meet specifications below 50 MHz. With AC coupling, specifications apply at frequencies of 50 MHz and higher. Statistical observations at 10 MHz with AC coupling show that most instruments meet the DC-coupled specifications, however, a small percentage of instruments are expected to have errors exceeding 0.5 dB at 10 MHz at the temperature extreme. The effect at 20 to 50 MHz is negligible but not warranted.

Input attenuation switching uncertainty		Specifications	Additional information
Attenuation > 2 dB, preamp off Relative to 10 dB (reference setting)	50 MHz (reference frequency) 9 kHz to 3.6 GHz 3.5 to 7.0 GHz 6.9 to 13.6 GHz 13.5 to 26.5 GHz > 26.5 GHz	± 0.20 dB	± 0.08 dB typical ± 0.3 dB nominal ± 0.5 dB nominal ± 0.7 dB nominal ± 0.7 dB nominal ± 1.0 dB nominal
Total absolute amplitude accuracy			
(10 dB attenuation, 20 to 30 °C, 1 Hz ≤ RBW ≤ 1 MHz, input signal –10 to –50 dBm, all settings auto-coupled except Auto Swp Time = Accy, any reference level, any scale, σ = nominal standard deviation)			
	At 50 MHz At all frequencies 9 kHz to 3.6 GHz	± 0.40 dB ± (0.40 dB + frequency response) ± 0.27 dB (95th Percentile ≈ 2σ)	
Preamp on	100 kHz to 3.6 GHz	± (0.39 dB + frequency response)	
Input voltage standing wave ratio (VSWR) (≥ 10 dB input attenuation)			
		Options 503, 507, 513, 526	Options 532, 544
	10 MHz to 3.6 GHz 3.6 to 26.5 GHz 26.5 to 44 GHz	< 1.2:1 nominal < 1.8:1 nominal N/A	1.2:1 nominal 1.5:1 nominal < 1.8:1 nominal
Resolution bandwidth switching uncertainty (referenced to 30 kHz RBW)			
1 Hz to 3 MHz RBW	± 0.10 dB		
4, 5, 6, 8 MHz RBW	± 1.0 dB		
Reference level			
Range			
Log scale	–170 to +23 dBm in 0.01 dB steps		
Linear scale	Same as Log (707 pV to 3.16 V)		
Accuracy	0 dB		
Display scale switching uncertainty			
Switching between linear and log	0 dB		
Log scale/div switching	0 dB		
Display scale fidelity			
Between –10 dBm and –80 dBm input mixer level	± 0.15 dB total		
Trace detectors			
Normal, peak, sample, negative peak, log power average, RMS average, and voltage average			
Preamplifier (Option P03, P07, P32, P44)			
Frequency range	Option P03 Option P07 Option P32 Option P44	100 kHz to 3.6 GHz 100 kHz to 7 GHz 100 kHz to 32 GHz 100 kHz to 44 GHz	
Gain	100 kHz to 3.6 GHz 3.6 to 7.0 GHz > 7 GHz	+20 dB nominal +35 dB nominal +40 dB nominal	
Noise figure	100 kHz to 3.6 GHz 3.6 to 8.4 GHz 8.4 to 13.6 GHz > 13.6 GHz	8 to 12 dB nominal (proportional to frequency) 9 dB nominal 10 dB nominal DANL + 176.24 dB nominal	

Dynamic Range Specifications

1 dB gain compression (two-tone)			
		Total power at mixer input	
RF/MW (Option 503, 507, 513, 526)	20 MHz to 26.5 GHz	+9 dBm nominal	
		Total power at preamp input	
Preamp on RF/MW (Option 503, 507, 513, 526)	10 MHz to 3.6 GHz 3.6 to 7.0 GHz	-10 dBm nominal -26 dBm nominal	
		Total power at mixer input	
Millimeter-wave (Option 532, 544)	20 MHz to 26.5 GHz 26.5 to 44 GHz	+6 dBm nominal 0 dBm nominal	
		Total power at preamp input	
Preamp on	10 MHz to 3.6 GHz 3.6 to 26.5 GHz	-14 dBm nominal	
Millimeter-wave (Option 532, 544)	Tone spacing: 100 kHz to 20 MHz Tone spacing: > 70 MHz > 26.5 GHz	-28 dBm nominal -20 dBm nominal -30 dBm nominal	
Displayed average noise level (DANL)			
(Input terminated, sample or average detector, averaging type = Log, 0 dB input attenuation, IF Gain = High, 20 to 30 °C)			
		Specification	Typical
RF/MW (Option 503, 507, 513, 526)	1 to 10 MHz	-147 dBm	-149 dBm
	10 MHz to 2.1 GHz	-148 dBm	-150 dBm
	2.1 to 3.6 GHz	-147 dBm	-149 dBm
	3.6 to 7.0 GHz	-147 dBm	-149 dBm
	7.0 to 13.6 GHz	-143 dBm	-147 dBm
	13.6 to 17.1 GHz	-137 dBm	-142 dBm
	17.1 to 22 GHz	-137 dBm	-142 dBm
	22 to 26.5 GHz	-134 dBm	-140 dBm
Preamp on RF/MW (Option 503, 507, 513, 526)	10 MHz to 2.1 GHz	-161 dBm	-163 dBm
	2.1 to 3.6 GHz	-160 dBm	-162 dBm
	3.6 to 7.0 GHz	-160 dBm	-162 dBm
Millimeter-wave (Option 532, 544)	9 kHz to 1 MHz	-	-130 dBm
	1 MHz to 1.2 GHz	-152 dBm	-155 dBm
	1.2 to 2.1 GHz	-151 dBm	-154 dBm
	2.1 to 3.6 GHz	-149 dBm	-152 dBm
	3.5 to 4.2 GHz	-144 dBm	-147 dBm
	4.2 to 8.4 GHz	-145 dBm	-150 dBm
	8.3 to 13.6 GHz	-147 dBm	-150 dBm
	13.5 to 20 GHz	-145 dBm	-148 dBm
	20 to 26.5 GHz	-142 dBm	-145 dBm
	26.4 to 34 GHz	-140 dBm	-144 dBm
34.4 to 44 GHz	-135 dBm	-140 dBm	

1. N is the LO multiplication factor.

Displayed average noise level (DANL) (continued)

Preamplifier on millimeter-wave (Option 532, 544)	100 kHz to 1 MHz	-145 dBm	-148 dBm
	1 MHz to 1.2 GHz	-164 dBm	-165 dBm
	1.2 to 2.1 GHz	-163 dBm	-164 dBm
	2.1 to 3.6 GHz	-162 dBm	-163 dBm
	3.5 to 7 GHz	-160 dBm	-162 dBm
	7 to 20 GHz	-160 dBm	-162 dBm
	20 to 26.5 GHz	-158 dBm	-160 dBm
	26.5 to 32 GHz	-156 dBm	-159 dBm
	32 to 34 GHz	-156 dBm	-159 dBm
	33.9 to 40 GHz	-153 dBm	-155 dBm
40 to 44 GHz	-149 dBm	-153 dBm	

Spurious responses

Residual responses (input terminated and 0 dB attenuation)	200 kHz to 8.4 GHz (swept)	-100 dBm
	Zero span or FFT or other frequencies	-100 dBm nominal

	Tuned frequency (f)	Mixer level	Response
Image responses (Excitation freq. = f + 645 MHz)	10 MHz to 3.6 GHz	-10 dBm	-80 dBc (-107 dBc typical)
	3.6 to 13.6 GHz	-10 dBm	-75 dBc (-87 dBc typical)
	13.6 to 17.1 GHz	-10 dBm	-71 dBc (-85 dBc typical)
	17.1 to 22 GHz	-10 dBm	-68 dBc (-82 dBc typical)
	22 to 26.5 GHz	-10 dBm	-66 dBc (-78 dBc typical)
	26.5 to 34.5 GHz	-30 dBm	-70 dBc (-94 dBc typical)
34.5 to 44 GHz	-30 dBm	-60 dBc (-79 dBc typical)	
LO related spurious (f > 600 MHz from carrier, 10 MHz to 3.6 GHz)	10 MHz to 3.6 GHz		-90 dBc + 20 log N ¹ typical
Other spurious response			
Carrier frequency ≤ 26.5 GHz			
First RF order (f ≥ 10 MHz from carrier)	-10 dBm		-80 dBc + 20log(N ¹) Including IF feedthrough, LO harmonic mixing responses
Higher RF order (f ≥ 10 MHz from carrier)	-40 dBm		-80 dBc + 20log(N ¹) Including higher order mixer responses
Carrier frequency > 26.5 GHz			
First RF order (f ≥ 10 MHz from carrier)	-30 dBm		-90 dBc nominal
Higher RF order (f ≥ 10 MHz from carrier)	-30 dBm		-90 dBc nominal

1. N is the LO multiplication factor.

Second harmonic distortion (SHI)

	Source frequency	SHI (nominal)
RF/MW (Option 503, 507, 513, 526)	10 MHz to 1.8 GHz	+45 dBm
	1.75 to 7.0 GHz	+65 dBm
	7.0 to 11.0 GHz	+55 dBm
	11.0 to 13.25 GHz	+50 dBm
Millimeter-wave (Option 532, 544)	10 MHz to 1.8 GHz	+45 dBm
	1.8 to 6.5 GHz	+65 dBm
	6.5 to 10 GHz	+60 dBm
	10 to 13.25 GHz	+55 dBm
	13.25 to 22 GHz	+50 dBm

Third-order intermodulation distortion (TOI)

(Two –30 dBm tones at input mixer with tone separation > 5 times IF prefilter bandwidth, 20 to 30 °C, see Specifications Guide for IF prefilter bandwidths)

		TOI	TOI (typical)
RF/MW (Option 503, 507, 513, 526)	100 to 400 MHz	+10 dBm	+14 dBm
	400 MHz to 1.7 GHz	+11 dBm	+15 dBm
	1.7 to 3.6 GHz	+13 dBm	+17 dBm
	3.6 to 5.1 GHz	+11 dBm	+17 dBm
	5.1 to 7.0 GHz	+13 dBm	+17 dBm
	7.0 to 13.6 GHz	+11 dBm	+15 dBm
	13.6 to 26.5 GHz	+9 dBm	+14 dBm
Preamp on RF/MW (Option 503, 507, 513, 526)	30 MHz to 3.6 GHz (two –45 dBm tones at preamp)		0 dBm nominal
	3.6 to 7 GHz (two –50 dBm tones at preamp)		–18 dBm nominal
Millimeter-wave (Option 532, 544)	10 to 100 MHz	+12 dBm	+17 dBm
	100 MHz to 3.95 GHz	+15 dBm	+19 dBm
	3.95 to 8.4 GHz	+15 dBm	+18 dBm
	8.3 to 13.6 GHz	+15 dBm	+18 dBm
	13.5 to 17.1 GHz	+11 dBm	+17 dBm
	17.0 to 26.5 GHz	+10 dBm	+17 dBm (nominal)
	26.5 to 44 GHz	–	+13 dBm (nominal)
Preamp on, millimeter-wave (Option 532, 544)	30 MHz to 3.6 GHz (two –45 dBm tones at preamp level)		0 dBm (nominal)
	3.6 to 26.5 GHz (two –50 dBm tones at preamp level)		–18 dBm (nominal)

1. N is the LO multiplication factor.

Nominal dynamic range for Options 503, 507, 513 and 526

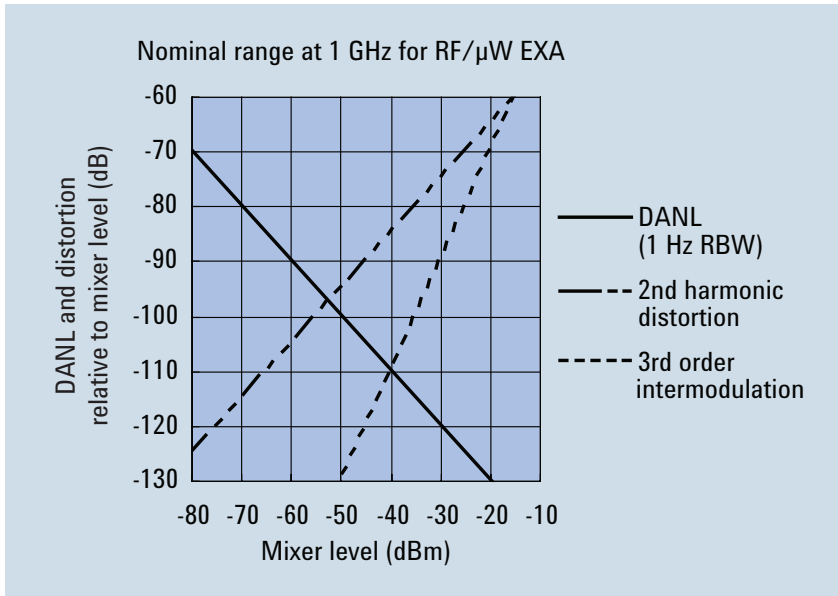


Figure 1. Nominal dynamic range – Band 0, for second and third order distortion, 9 kHz to 3.6 GHz

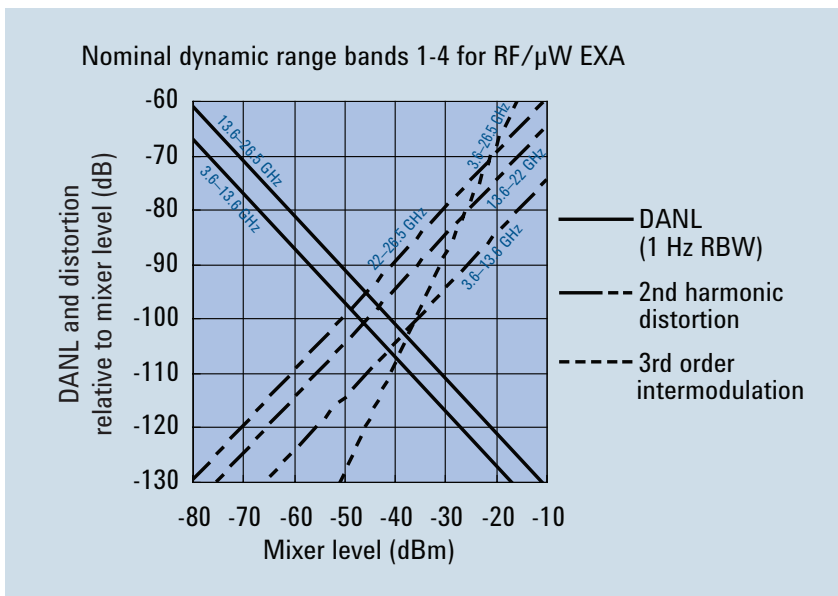


Figure 2. Nominal dynamic range – Bands 1 to 4, for second and third order distortion, 3.6 GHz to 26.5 GHz

Phase noise ¹	Offset	Specification	Typical
RF/MW	100 Hz	-84 dBc/Hz	-88 dBc/Hz
(Option 503, 507, 513, 526)	1 kHz	-	-98 dBc/Hz nominal
Noise sidebands	10 kHz	-99 dBc/Hz	-102 dBc/Hz
(20 to 30 °C, CF = 1 GHz)	100 kHz	-112 dBc/Hz	-114 dBc/Hz
	1 MHz	-132 dBc/Hz	-135 dBc/Hz
	10 MHz	-	-143 dBc/Hz nominal

1. For nominal phase noise values with the RF/MW EXA (Option 503, 507, 513, or 526), refer to Figure 3.

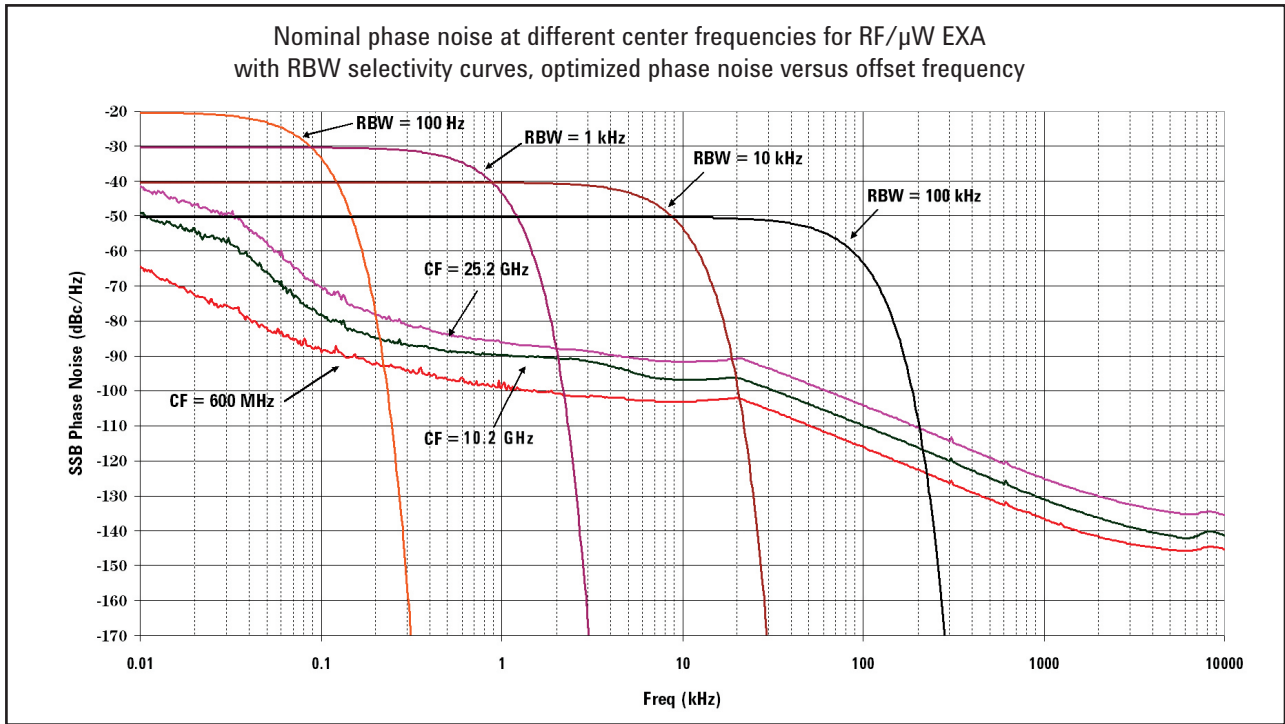


Figure 3. Nominal phase noise at different center frequencies for RF/MW EXA (Option 503, 507, 513, or 526)

Phase noise ¹	Offset	Specification	Typical
Millimeter-wave	100 Hz	-84 dBc/Hz	-88 dBc/Hz
(Option 532, 544)	1 kHz	-	-101 dBc/Hz nominal
Noise sidebands	10 kHz	-103 dBc/Hz	-106 dBc/Hz
(20 to 30 °C, CF = 1 GHz)	100 kHz	-115 dBc/Hz	-116 dBc/Hz
	1 MHz	-135 dBc/Hz	-137 dBc/Hz
	10 MHz	-	-149 dBc/Hz nominal

1. For nominal phase noise values with the millimeter-wave EXA (Option 532 or 544), refer to Figure 4.

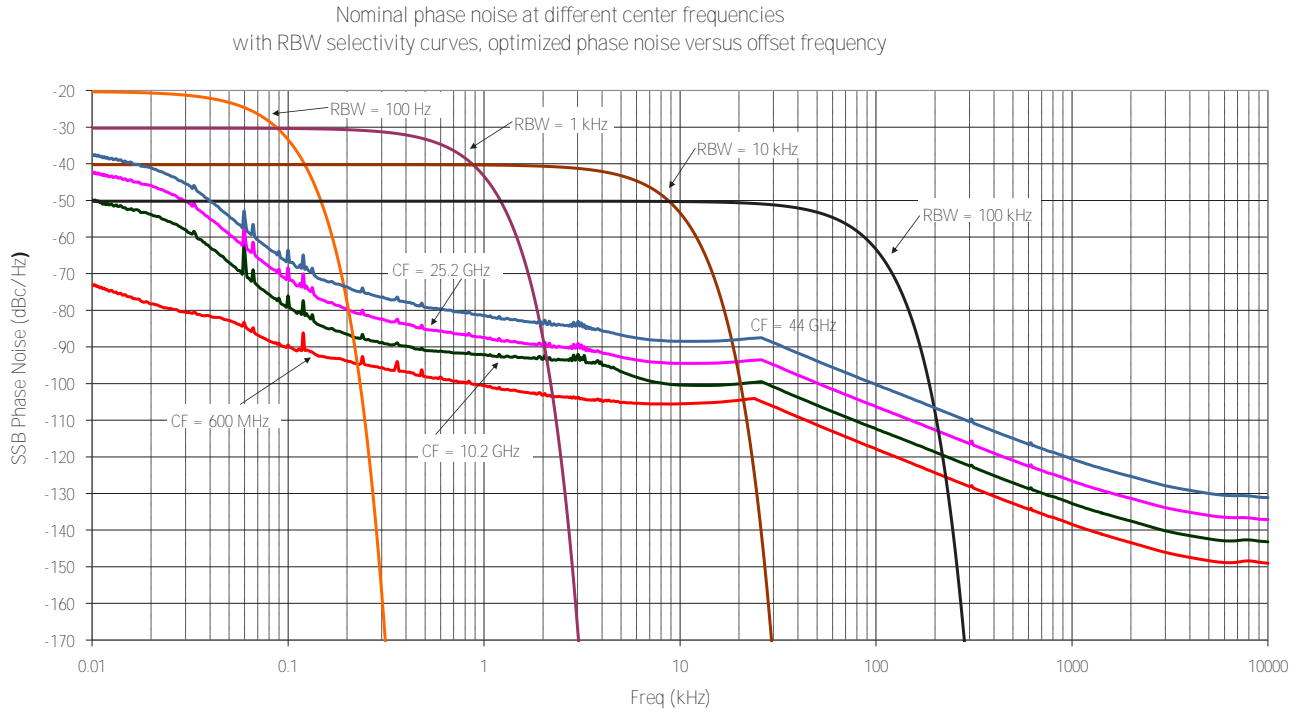


Figure 4. Nominal phase noise at different center frequencies for millimeter-wave EXA (Option 532 or 544)

PowerSuite Measurement Specifications

Channel power		
Amplitude accuracy, W-CDMA or IS95 (20 to 30 °C, attenuation = 10 dB)	± 0.94 dB (±0.30 dB 95th percentile)	
Occupied bandwidth		
Frequency accuracy	± [span/1000] nominal	
Adjacent channel power		
Accuracy, W-CDMA (ACLR) (at specific mixer levels and ACLR ranges)	Adjacent	Alternate
MS	± 0.22 dB	± 0.34 dB
BTS	± 1.07 dB	± 1.00 dB
Dynamic range (typical)		
Without noise correction	-68 dB	-74 dB
With noise correction	-73 dB	-76 dB
Offset channel pairs measured	1 to 6	
ACP measurement and transfer time (fast method)	14 ms nominal ($\sigma = 0.2$ dB)	
Multiple number of carriers measured	Up to 12	
Power statistics CCDF		
Histogram resolution	0.01 dB	
Harmonic distortion		
Maximum harmonic number	10th	
Result	Fundamental power (dBm), relative harmonics power (dBc), total harmonic distortion in %	
Intermod (TOI)	Measure the third-order products and intercepts from two tones	
Burst power		
Methods	Power above threshold, power within burst width	
Results	Single burst output power, average output power, maximum power, minimum power within burst, burst width	
Spurious emission		
W-CDMA (1 to 3.6 GHz) table-driven spurious signals; search across regions		
Dynamic range	93.1 dB	(98.4 dB typical)
Absolute sensitivity	-79.4 dBm	(-85.4 dBm typical)
Spectrum emission mask (SEM)		
cdma2000® (750 kHz offset)		
Relative dynamic range (30 kHz RBW)	74.0 dB	(81.0 dB typical)
Absolute sensitivity	-94.7 dBm	(-100.7 dBm typical)
Relative accuracy	± 0.11 dB	
3GPP W-CDMA (2.515 MHz offset)		
Relative dynamic range (30 kHz RBW)	76.5 dB	(83.9 dB typical)
Absolute sensitivity	-94.7 dBm	(-100.7 dBm typical)
Relative accuracy	± 0.12 dB	

General Specifications

Temperature range

Operating	0 to 55 °C
Storage	-40 to 70 °C

EMC

Complies with European EMC Directive 2004/108/EC

- IEC/EN 61326-1 or IEC/EN 61326-2-1
- CISPR Pub 11 Group 1, class A
- AS/NZS CISPR 11:2002
- ICES/NMB-001

This ISM device complies with Canadian ICES-001

Cet appareil ISM est conforme à la norme NMB-001 du Canada

Safety

Complies with European Low Voltage Directive 73/23/EEC, amended by 93/68/EEC

- IEC/EN 61010-1 2nd Edition
- Canada: CSA C22.2 No. 61010-1
- USA: UL 61010-1 2nd Edition

Audio noise

Acoustic noise emission	Geraeuschemission
LpA < 70 dB	LpA < 70 dB
Operator position	Am Arbeitsplatz
Normal position	Normaler Betrieb
Per ISO 7779	Nach DIN 45635 t.19

Environmental stress

Samples of this product have been type tested in accordance with the Agilent Environmental Test Manual and verified to be robust against the environmental stresses of storage, transportation, and end-use; those stresses include, but are not limited to, temperature, humidity, shock, vibration, altitude, and power line conditions; test methods are aligned with IEC 60068-2 and levels are similar to MILPRF-28800F Class 3.

Power requirements

Voltage and frequency (nominal)	100 to 120 V, 50/60/400 Hz 220 to 240 V, 50/60 Hz
Power consumption	
On	350 W maximum
Standby	20 W

Display

Resolution	1024 x 768, XGA
Size	213 mm (8.4 in.) diagonal (nominal)

Data storage

Internal	≥ 80 GB nominal (removable solid state drive)
External	Supports USB 2.0 compatible memory devices

Weight (without options)

Net	16 kg (35 lbs) nominal
Shipping	28 kg (62 lbs) nominal

Dimensions

Height	177 mm (7.0 in)
Width	426 mm (16.8 in)
Length	368 mm (14.5 in)

Warranty

The EXA signal analyzer is supplied with a one-year warranty

Calibration cycle

The recommended calibration cycle is two years; calibration services are available through Agilent service centers

Inputs and Outputs

Front panel	
RF input connector	
Standard (Option 503, 507, 513, or 526)	Type-N female, 50 Ω nominal
Standard (Option 532 or 544)	2.4 mm male, 50 Ω nominal
Probe power	
Voltage/current	+15 Vdc, $\pm 7\%$ at 150 mA max nominal -12.6 Vdc, $\pm 10\%$ at 150 mA max nominal
USB 2.0 ports	
Master (2 ports)	
Standard	Compatible with USB 2.0
Connector	USB Type-A female
Output current	0.5 A nominal
External mixing, Option EXM (available only with EXA millimeter wave, Option 532 or 544)	
Connection port	
Connector	SMA, female
Impedance	50 Ω nominal
Functions	Triplexed for mixer bias, IF input and LO output
Mixer bias range	± 10 mA in 10 μ A step
IF input center frequency	
Narrowband IF path	322.5 MHz
LO output frequency range	3.75 to 14.0 GHz
Rear panel	
10 MHz out	
Connector	BNC female, 50 Ω nominal
Output amplitude	≥ 0 dBm nominal
Frequency	10 MHz \pm (10 MHz x frequency reference accuracy)
Ext Ref In	
Connector	BNC female, 50 Ω nominal
Input amplitude range	-5 to 10 dBm nominal
Input frequency	10 MHz nominal
Frequency lock range	$\pm 5 \times 10^{-6}$ of specified external reference input frequency
Trigger 1 and 2 inputs	
Connector	BNC female
Impedance	> 10 k Ω nominal
Trigger level range	-5 to 5 V
Trigger 1 and 2 outputs	
Connector	BNC female
Impedance	50 Ω nominal
Level	5 V TTL nominal
Monitor output	
Connector	VGA compatible, 15-pin mini D-SUB
Format	XGA (60 Hz vertical sync rates, non-interlaced) Analog RGB
Resolution	1024 x 768

Rear panel	
Noise source drive +28 V (pulsed) Connector	BNC female
SNS Series noise source connector	For use with Agilent SNS Series noise sources
Analog out Connector	BNC female (used by Option YAS)
USB 2.0 ports Master (4 ports) Standard Connector Output current Slave (1 port) Standard Connector Output current	Compatible with USB 2.0 USB Type-A female 0.5 A nominal Compatible with USB 2.0 USB Type-B female 0.5 A nominal
GPIO interface Connector GPIO codes GPIO mode	IEEE-488 bus connector SH1, AH1, T6, SR1, RL1, PP0, DC1, C1, C2, C3, C28, DT1, L4, C0 Controller or device
LAN TCP/IP interface Standard Connector	1000Base-T RJ45 Ethertwist
IF output Connector Impedance	SMA female, shared by Option CR3 and CRP 50 Ω nominal
Wideband IF output, Option CR3	
Center frequency SA mode or I/Q analyzer with IF BW \leq 25 MHz with Option B40	322.5 MHz 250 MHz
Conversion gain	-1 to +4 dB (nominal) plus RF frequency response
Bandwidth Low band High band, with preselector High band, with preselector bypassed	Up to 140 MHz (nominal) Depends on center frequency Up to 410 MHz
Programmable IF output, Option CRP	
Center frequency Range Resolution	10 to 75 MHz (user selectable) 0.5 MHz
Conversion gain	-1 to +4 dB (nominal) plus RF frequency response
Bandwidth Output at 70 MHz center Low band or high band with preselector bypassed ¹ Preselected band	100 MHz (nominal) Depends on RF center frequency
Lower output frequencies	Subject to folding
Residual output signals	\leq -88 dBm (nominal)

1. Option MPB installed and enabled.

I/Q Analyzer

Frequency				
Frequency span				
Standard	10 Hz to 10 MHz			
Option B25 (standard)	10 Hz to 25 MHz			
Option B40 ¹	10 Hz to 40 MHz			
Resolution bandwidth (spectrum measurement)				
Range				
Overall	100 mHz to 3 MHz			
Span = 1 MHz	50 Hz to 1 MHz			
Span = 10 kHz	1 Hz to 10 kHz			
Span = 100 Hz	100 mHz to 100 Hz			
Window shapes				
Flat top, Uniform, Hanning, Gaussian, Blackman, Blackman-Harris, Kaiser Bessel (K-B 70 dB, K-B 90 dB and K-B 110 dB)				
Analysis bandwidth				
Standard	10 Hz to 10 MHz			
Option B25 (standard)	10 Hz to 25 MHz			
Option B40 ¹	10 Hz to 40 MHz			
IF frequency response (standard 10 MHz IF path)				
IF frequency response (demodulation and FFT response relative to the center frequency, 20 to 30 °C)				
Center frequency (GHz)	Span (MHz)	Preselector	Max. error	RMS
≤ 3.6	≤ 10	n/a	± 0.40 dB	0.04 dB nominal
3.6 < f ≤ 26.5	≤ 10	on		0.25 dB nominal
3.6 < f ≤ 26.5	≤ 10	off ²	± 0.45 dB	0.04 dB nominal
f > 26.5 (Option 532 or 544)	≤ 10	on		0.20 dB nominal
IF phase linearity (deviation from mean phase linearity, nominal)				
Center frequency (GHz)	Span (MHz)	Preselector	Peak-to-peak	RMS
< 3.6	≤ 10	n/a	0.4°	0.1°
3.6 ≤ f ≤ 26.5	≤ 10	off ¹	0.4°	0.1°
≥ 3.6 (Option 532 or 544)	≤ 10	on	1.4°	0.4°
Data acquisition (10 MHz IF path)				
Time record length IQ analyzer	4,000,000 IQ sample pairs			
Sample rate at ADC				
Option DP2, B40 or MPB ²	100 MSa/s			
None of the above	90 MSa/s			
ADC resolution				
Option DP2, B40 or MPB ²	16 bits			
None of the above	14 bits			

1. Available only on RF/MW EXA (Option 503, 507, 513, or 526).

2. Option MPB is installed and enabled; Option MPB is only available on RF/MW EXA (Option 507, 513, or 526).

Option B25 (standard) 25 MHz analysis bandwidth

IF frequency response (demodulation and FFT response relative to the center frequency, 20 to 30 °C)

Center frequency (GHz)	Span (MHz)	Preselector	Max. error	RMS
≤ 3.6	10 to ≤ 25	n/a	± 0.45 dB	0.051 dB nominal
3.6 < f ≤ 26.5	10 to ≤ 25	on		0.45 dB nominal
3.6 < f ≤ 26.5	10 to ≤ 25	off ¹	± 0.45 dB	0.05 dB nominal
> 26.5 (Option 532 or 544)	10 to ≤ 25	on		0.45 dB nominal

IF phase linearity (deviation from mean phase linearity, nominal)

Center frequency (GHz)	Span (MHz)	Preselector	Peak-to-peak	RMS
0.02 ≤ f < 3.6	≤ 25	n/a	0.6°	0.14°
3.6 ≤ f ≤ 26.5	≤ 25	on	4.5°	1.2°
3.6 ≤ f ≤ 26.5	≤ 25	off ¹	1.9°	0.4 °

Data acquisition (25 MHz IF path)

Time record length (IQ pairs) IQ Analyzer	4,000,000 IQ sample pairs			
89600 software or N9064A	32-bit packing	64-bit packing	Memory	
Option DP2, B40 or MPB ²	536 MSa	268 MSa	2 GB	
None of the above	4,000,000 IQ sample pairs (independent of data packing)			
Sample rate at ADC				
Option DP2, B40 or MPB ²	100 MSa/s			
None of the above	90 MSa/s			
ADC resolution				
Option DP2, B40 or MPB ²	16 bits			
None of the above	14 bits			

Option B40 40 MHz analysis bandwidth ³

IF frequency response (demodulation and FFT response relative to the center frequency, 20 to 30 °C)

Center frequency (GHz)	Span (MHz)	Preselector	Max. error	RMS
0.03 ≤ f < 3.6	≤ 40	n/a	± 0.3 dB	± 0.08 dB nominal
3.6 ≤ f ≤ 26.5	≤ 40	off ¹	± 0.25 dB	± 0.08 dB nominal

IF phase linearity (deviation from mean phase linearity, nominal)

Center frequency (GHz)	Span (MHz)	Preselector	Peak-to-peak	RMS
0.02 ≤ f < 3.6	40	n/a	0.2°	0.05°
3.6 ≤ f ≤ 26.5	40	off ¹	5°	1.4°

Data acquisition (40 MHz IF path)

Time record length (IQ pairs) IQ analyzer	4,000,000 samples (I/Q pairs)			
89600 VSA software or N9064A VXA	32-bit packing	64-bit packing	2 GB total memory (nominal)	
Length (IQ sample pairs)	536 MSa	268 MSa		
Length (time units)	Samples/(span x 1.25) (nominal)			
Sample rate				
At ADC	200 Msa/s			
IQ pairs	Span x 1.25 (nominal)			
ADC resolution	12 bits			

1. Option MPB is installed and enabled. Option MPB is only available on RF/MW EXA (Option 507, 513, or 526).

2. These options are not available on millimeter-wave EXA (Option 532 or 544).

3. (1)Option B40 is only available on RF/MW EXA (Option 503, 507, 513, or 526).

Related Literature

Brochure 5989-6527EN

Configuration Guide 5989-6531EN

For more information or literature resources please visit the web:
www.agilent.com/find/exas

cdma2000® is a registered certification mark of the Telecommunications Industry Association.

Windows® and MS Windows are U.S. registered trademarks of Microsoft® Corporation.



Agilent Email Updates

www.agilent.com/find/emailupdates
Get the latest information on the products and applications you select.



www.lxistandard.org

LAN eXtensions for Instruments puts the power of Ethernet and the Web inside your test systems. Agilent is a founding member of the LXI consortium.

Agilent Channel Partners

www.agilent.com/find/channelpartners
Get the best of both worlds: Agilent's measurement expertise and product breadth, combined with channel partner convenience.



Agilent Advantage Services is committed to your success throughout your equipment's lifetime. To keep you competitive, we continually invest in tools and processes that speed up calibration and repair and reduce your cost of ownership. You can also use Infoline Web Services to manage equipment and services more effectively. By sharing our measurement and service expertise, we help you create the products that change our world.

www.agilent.com/find/advantageservices



www.agilent.com/quality

www.agilent.com

For more information on Agilent Technologies' products, applications or services, please contact your local Agilent office. The complete list is available at:

www.agilent.com/find/contactus

Americas

Canada	(877) 894 4414
Brazil	(11) 4197 3600
Mexico	01800 5064 800
United States	(800) 829 4444

Asia Pacific

Australia	1 800 629 485
China	800 810 0189
Hong Kong	800 938 693
India	1 800 112 929
Japan	0120 (421) 345
Korea	080 769 0800
Malaysia	1 800 888 848
Singapore	1 800 375 8100
Taiwan	0800 047 866
Other AP Countries	(65) 375 8100

Europe & Middle East

Belgium	32 (0) 2 404 93 40
Denmark	45 45 80 12 15
Finland	358 (0) 10 855 2100
France	0825 010 700*
	*0.125 €/minute
Germany	49 (0) 7031 464 6333
Ireland	1890 924 204
Israel	972-3-9288-504/544
Italy	39 02 92 60 8484
Netherlands	31 (0) 20 547 2111
Spain	34 (91) 631 3300
Sweden	0200-88 22 55
United Kingdom	44 (0) 118 927 6201

For other unlisted countries:

www.agilent.com/find/contactus

Revised: January 6, 2012

Product specifications and descriptions in this document subject to change without notice.

© Agilent Technologies, Inc. 2012
Published in USA, April 27, 2012
5989-6529EN



Agilent Technologies